OBJECTIVE	This procedure outlines the steps and responsibilities for effectively demobilizing resources, completing post-project activities, and formally closing out a project after substantial completion of construction. The aim is to ensure an orderly handover to the client, finalize all contractual obligations, and capture lessons learned for future projects.
SCOPE	This procedure applies to all construction projects undertaken by BHBI. It covers the period from substantial completion of construction to the end of the defects liability period (or warranty period) and final project closure.

Responsibilities

- **Project Manager:** Overall responsibility for the successful execution of demobilization and post-project activities. Coordinates all involved parties and ensures timely completion of tasks.
- **Project Engineer:** Responsible for overseeing site demobilization activities, coordinating the handover process with the client, and ensuring that all project documentation is finalized and archived.
- **Site Engineer:** Responsible for overseeing the physical demobilization of the site, removal of temporary facilities, and site cleanup.
- **Procurement:** Responsible for managing the closeout of contracts with subcontractors and suppliers, including final payments and release of retention.
- **Quantity Surveyor:** Responsible for preparing the final account, finalizing project costs, and assisting with the resolution of any outstanding financial matters.
- **Office Engineer:** Responsible for archiving all project documents and records, including those related to demobilization and post-project activities.
- **Safety Officer:** Responsible for ensuring that demobilization activities are carried out safely and that the site is left in a safe condition.

Flowchart

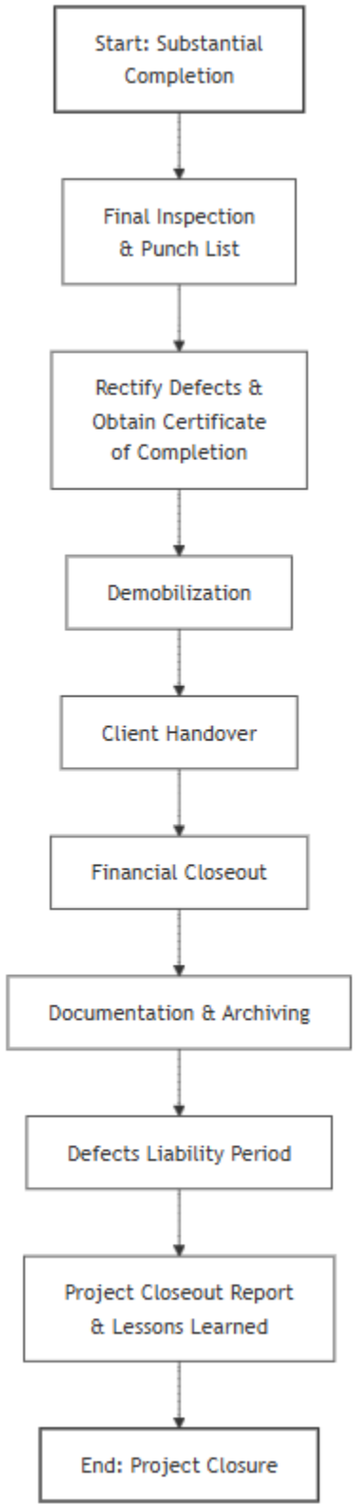

Procedure

4.1. Substantial Completion:

- **Final Inspection:** The Project Engineer, in coordination with the client and consultants, conducts a final inspection of the project to verify that the work has been completed in accordance with the contract documents.
  - **Deliverables:** Final Inspection Report
- **Punch List/Defects List:** A punch list (or defects list) is created, identifying any outstanding work or deficiencies that need to be rectified before substantial completion can be certified.
- **Rectification of Defects:** The Project Engineer ensures that all punch list items are addressed and completed within the agreed timeframe.
- **Certificate of Substantial Completion:** Once the punch list items are satisfactorily completed, the client or their representative issues a Certificate of Substantial Completion. This certificate marks the official start of the defects liability period (or warranty period).
  - **Deliverables:** Certificate of Substantial Completion

4.2. Demobilization:

- **Demobilization Plan:** The Project Engineer, in coordination with the Site Engineer, develops a demobilization plan that outlines the sequence of activities for removing resources from the site.
    - **Deliverables:** Demobilization Plan
- **Removal of Temporary Facilities:** Dismantle and remove all temporary facilities, such as site offices, storage containers, temporary fencing, and utilities, ensuring proper disposal or recycling of materials.
- **Site Cleanup:** Conduct a thorough cleanup of the site, removing all construction debris, waste materials, and surplus materials.
- **Equipment Demobilization:** Demobilize and remove all construction equipment from the site, ensuring proper cleaning and maintenance before returning to storage. Coordinate with Logistics Personnel for equipment removal.
- **Personnel Demobilization:** Demobilize the project team, ensuring that all personnel-related matters are addressed (e.g., final timesheets, performance reviews, etc.).
- **Utility Disconnections:** Disconnect and cap off all temporary utilities (power, water, etc.).
- **Site Security Handover:** Transfer responsibility for site security to the client or their designated representative.
- **HSE Closeout:** The Safety Officer conducts a final HSE inspection to ensure that the site is left in a safe and environmentally sound condition.
    - **Deliverables:** HSE Closeout Report

4.3. Handover to Client:

- **Operation and Maintenance (O&M) Manuals:** The Project Engineer ensures that all O&M manuals, as-built drawings, warranties, and other relevant documentation are compiled and submitted to the client.
    - **Deliverables:** O&M Manuals, As-Built Drawings, Warranties
- **Training:** Provide training to the client's personnel on the operation and maintenance of the completed facility, as required by the contract.
- **Key Handover:** Officially hand over the keys to the completed facility to the client.
- **Final Walkthrough:** Conduct a final walkthrough with the client to ensure their satisfaction with the project.

4.4. Financial Closeout:

- **Final Account Settlement:** The Quantity Surveyor prepares the final account, including all variations, claims, and adjustments.
    - **Deliverables:** Final Account Statement
- **Final Payment Application:** The Project Engineer submits the final payment application to the client for approval and payment.
- **Release of Retention:** Upon expiry of the defects liability period (or as stipulated in the contract), and rectification of any defects during that period, arrange for the release of retention monies held by the client.
- **Subcontractor/Supplier Closeout:** Procurement finalizes accounts with all subcontractors and suppliers, ensuring that all payments are made and obligations are met. This includes the release of any retention held on subcontractors.
- **Project Cost Report:** The Quantity Surveyor prepares a final project cost report, analyzing the project's financial performance against the budget.
    - **Deliverables:** Final Project Cost Report

4.5. Documentation and Archiving:

- **As-Built Drawings:** The Project Engineer ensures that as-built drawings are finalized and submitted to the client and archived.
- **Project Archive:** The Office Engineer organizes and archives all project documents, including contracts, drawings, specifications, correspondence, meeting minutes, reports, and photographs. Ensure the archive is properly indexed and stored securely.
    - **Deliverables:** Project Archive

4.6. Defects Liability Period (Warranty Period):

- **Defect Rectification:** The Project Engineer (or a designated individual) remains responsible for addressing any defects that arise during the defects liability period, coordinating with subcontractors for rectification work as needed.
- **Communication with Client:** Maintain communication with the client throughout the defects liability period to ensure that any issues are addressed promptly.
- **Final Inspection (End of Defects Liability Period):** Conduct a final inspection at the end of the defects liability period to ensure that all defects have been rectified.
    - **Deliverables:** Final Inspection Report (End of DLP)

4.7. Project Closeout Report:

- **Lessons Learned:** The Project Engineer conducts a post-project review meeting with the project team to identify lessons learned (what went well, what could be improved).
    - **Deliverables:** Lessons Learned Report
- **Project Closeout Report:** The Project Engineer prepares a formal project closeout report that includes:
    - Summary of project performance (schedule, cost, quality, safety).
    - Lessons learned.
    - Recommendations for future projects.
    - Client satisfaction feedback.
    - **Deliverables:** Project Closeout Report

Records Generated (Deliverables)

- Final Inspection Report
- Certificate of Substantial Completion
- Demobilization Plan
- HSE Closeout Report
- O&M Manuals
- As-Built Drawings
- Warranties
- Final Account Statement

- Final Project Cost Report
- Project Archive
- Final Inspection Report (End of DLP)
- Lessons Learned Report
- Project Closeout Report

Prepared by:	Reviewed by:	Approved by:	Noted by:
Marcone John Perea *Office Engineer*	**Mark Anthony Pajes** *Project Engineer*	**Nemesia P. Baylon** *Development Director*	**Adrian Carlo Escay** *President & CEO*