	Document No.	Section No.
	Effective Date:	Revision No.
	PROCEDURAL MANUAL	
	EQUIPMENT REPAIR PROCEDURE	

OBJECTIVE	This procedure outlines the process for repairing construction equipment owned by BHBI. The aim is to ensure that repairs are carried out safely, efficiently, and effectively, minimizing equipment downtime and maximizing equipment lifespan. This procedure is integrated with BHBI's *Preventive Maintenance Procedure*, *Procedure for Heavy Equipment Usage*, and *Equipment Inspection Procedure*.
SCOPE	This procedure applies to all construction equipment owned by BHBI and used on project sites, including: • Excavators • Loaders • Dozers • Cranes • Generators • Compactors • Forklifts • Other heavy equipment • Vehicles used for material and personnel transport

Responsibilities

- **Project Engineer:** Responsible for overseeing equipment repairs on their projects, approving repair requests, and coordinating with Logistics Personnel.
- **Site Engineer:** Responsible for on-site coordination of equipment repairs, ensuring that repaired equipment is safe for operation, and verifying that repairs have been completed satisfactorily.
- **Safety Officer:** Ensures that all repair work is carried out in compliance with safety regulations and BHBI's *Site Safety Procedure*.
- **Logistics Personnel:** Responsible for scheduling repairs, coordinating with external service providers, maintaining repair records, and managing spare parts inventory (if applicable).
- **Equipment Operators:** Responsible for reporting equipment defects promptly and accurately (through the ETR or Equipment Defect Report), and cooperating with repair personnel.
- **External Service Providers:** Responsible for performing specialized repairs as contracted by BHBI.

Procedure

4.1. Defect Reporting:

- **Reporting:** Equipment operators or other personnel identify and report equipment defects or malfunctions immediately to the Site Engineer and Logistics Personnel.
  - **Operational Equipment:** Defects are reported through the Equipment Time Record (ETR) as outlined in the *Procedure for Heavy Equipment Usage*.
  - **Non-Operational Equipment:** Defects are reported through the Equipment Defect Report.
- **Documentation:** The Logistics Personnel documents the defect report, including details about the equipment (make, model, serial number, ID number), the nature of the defect, the date and time of the report, the person reporting it, and the project site.
  - **Deliverables:** Equipment Defect Report, Equipment Time Record (ETR)

4.2. Repair Assessment and Prioritization:

- **Assessment:** The Project Engineer, in consultation with the Site Engineer and Logistics Personnel (and external service providers if needed), assesses the reported defect to determine the severity, the impact on safety and operations, and the appropriate course of action.
- **Prioritization:** The Project Engineer prioritizes repairs based on the following factors:
  - **Safety:** Defects that pose an immediate safety hazard are given the highest priority.
  - **Operational Impact:** Defects that significantly impact project operations are prioritized over those that have a lesser impact.
  - **Availability of Resources:** Consider the availability of parts, personnel, and external service providers.

4.3. Repair Authorization:

- **Approval:** The Project Engineer approves repair requests based on the assessment and prioritization.
  - **Deliverables:** Approved Repair Request

4.4. Repair Scheduling and Coordination:

- **Scheduling:** The Logistics Personnel schedules repairs with qualified external service providers, considering the availability of parts, personnel, and the project schedule.
- **Coordination:** The Logistics Personnel coordinates with the Project Engineer, Site Engineer, equipment operators, and external service providers to ensure that repairs are carried out efficiently and with minimal disruption to project operations.
- **Notification:** The Site Engineer is notified of the repair schedule.

4.5. Repair Execution:

- **External Service Providers:** External service providers perform repairs according to BHBI's instructions, the equipment manufacturer's recommendations, and relevant safety regulations. They provide detailed service reports upon completion of work.
  - **Deliverables:** Service Reports
- **Oversight:** The Project Engineer oversees the repairs to ensure they are performed correctly and meet quality standards.

4.6. Repair Verification and Testing:

- **Inspection:** Upon completion of repairs, the Site Engineer or designated personnel inspects the repaired equipment to verify that the defect has been corrected and that the equipment is safe to operate.
- **Testing:** The repaired equipment is tested to ensure that it is functioning properly. The Site Engineer may require a trial run or functional test before the equipment is put back into service.

- **Documentation:** The results of the inspection and testing are documented.

4.7. Documentation and Record Keeping:

- **Repair Records:** The Logistics Personnel maintains detailed records of all repairs performed on each piece of equipment, including:
  - Date of repair
  - Description of the defect
  - Repairs performed
  - Parts used (if any)
  - Name of the external service provider
  - Labor hours and costs
  - Downtime
  - **Deliverables:** Repair Records, Equipment Service History
- **Integration with PM:** Ensure that repair records are integrated with the Preventive Maintenance records to provide a complete service history for each piece of equipment.
- **Filing:** The Office Engineer is responsible for filing and archiving all physical repair-related documents.

4.8. Parts and Supplies Management (if applicable):

- **Inventory Control:** If BHBI maintains an inventory of spare parts, the Logistics Personnel are responsible for managing the inventory, ordering parts as needed, and ensuring proper storage.

Flowchart

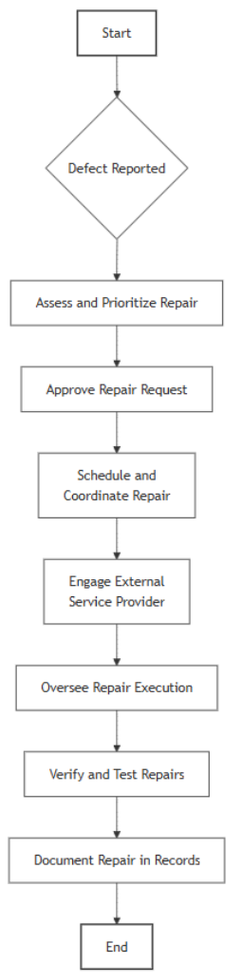

Prepared by:	Reviewed by:	Approved by:	Noted by:
Marcone John Perea *Office Engineer*	**Mark Anthony Pajes** *Project Engineer*	**Nemesia P. Baylon** *Development Director*	**Adrian Carlo Escay** *President & CEO*