OBJECTIVE	This procedure provides a general framework for managing and executing on-site construction activities for BHBI projects. The aim is to ensure that construction work is carried out safely, efficiently, in accordance with approved plans and specifications, meets quality standards, and adheres to the project schedule and budget.
SCOPE	This procedure applies to all on-site construction activities undertaken by BHBI, from the issuance of the Notice to Proceed (NTP) through to achieving Substantial Completion. It serves as an overarching guide, referencing more specific procedures for detailed activities.

Responsibilities

- Project Manager: Overall responsibility for the successful execution of the construction phase, including managing budget, schedule, and resources.
- Project Engineer: Responsible for the technical oversight of construction activities, coordination between disciplines, implementation of plans (safety, quality, logistics), management of variations, and ensuring compliance with contract documents.
- Site Engineer: Responsible for the day-to-day supervision of construction activities, managing site resources (personnel, materials, equipment), monitoring progress, coordinating subcontractors, and ensuring adherence to safety and quality procedures on site.
- Foremen: Responsible for direct supervision of work crews, ensuring tasks are performed correctly and safely, coordinating daily activities, and reporting progress and issues to the Site Engineer.
- Safety Officer: Responsible for implementing and monitoring the *Site Safety Procedure*, conducting inspections, providing training, and promoting a safe working environment.
- QA/QC Personnel: Responsible for implementing the *Quality Assurance and Control Procedure*, conducting inspections and tests, and managing quality documentation.
- Procurement: Responsible for ensuring timely delivery of materials and services as per the *Procurement Procedure*.
- Logistics Personnel: Responsible for managing equipment availability and movements as per the *Equipment Tracking and Allocation Procedure*.
- Subcontractors: Responsible for executing their scope of work according to the contract, schedule, specifications, safety requirements, and quality standards, as managed through the *Subcontractor Management Procedure*.
- **All Site Personnel: Responsible for performing their work safely, efficiently, and according to instructions and procedures.**

4. Procedure

4.1. Site Setup Confirmation:

- **Verification:** Prior to commencing major construction activities, the Site Engineer verifies that the site setup is complete and aligns with the approved *Site Logistics and Planning Procedure* and *Mobilization and Pre-Project Activities Procedure*. This includes confirmation of temporary facilities, utilities, access, security, and signage.

4.2. Construction Execution Planning:

- **Review Key Documents:** The Project Engineer and Site Engineer review the following key documents with relevant Foremen and subcontractors before starting significant work packages:
  - Approved IFC Drawings and Specifications (*Drawing Management and Version Control Procedure*)
  - Baseline Project Schedule (*Project Scheduling Procedure*)
  - Site-Specific Safety Plan (*Site Safety Procedure*)
  - Project-Specific QA/QC Plan (*Quality Assurance and Control Procedure*)
  - Site Logistics Plan (*Site Logistics and Planning Procedure*)
  - Construction Risk Register (*Construction Risk Management Procedure*)
- **Resource Coordination:** Coordinate with Procurement and Logistics Personnel to confirm the availability and delivery schedule of required materials, equipment, and labor.

4.3. Commencement of Works:

- **NTP Confirmation:** Confirm receipt of the Notice to Proceed (NTP) from the client (as per *Mobilization and Pre-Project Activities Procedure*).
- **Initiate Activities:** Commence construction activities according to the approved project schedule.

4.4. Supervision and Coordination:

- **Daily Supervision:** The Site Engineer and Foremen provide daily supervision of construction activities, ensuring work is performed according to plans, specifications, and safe work methods.
- **Coordination:** Conduct regular site meetings (Daily Huddles, Weekly Progress, Coordination Meetings) as per the *Site Meetings Procedure* to coordinate activities between trades, subcontractors, and BHBI personnel.

4.5. Safety Implementation:

- **Adherence:** Strictly adhere to the *Site Safety Procedure* at all times.
- **Monitoring:** The Safety Officer conducts regular inspections and monitoring.
- **Reporting:** All personnel report hazards and incidents immediately.

4.6. Quality Control Implementation:

- **Adherence:** Strictly adhere to the *Quality Assurance and Control Procedure*.
- **Monitoring:** QA/QC Personnel conduct inspections and tests as per the ITPs.
- **Non-Conformance:** Manage any non-conformances according to the QA/QC procedure.

4.7. Resource Management:

- **Materials:** Manage materials on site according to the *Material Receiving and Inspection*, *Material Storage and Handling*, *Material Requisition and Issuance*, and *Inventory Control* procedures.
- **Equipment:** Manage equipment according to the *Equipment Inspection*, *Equipment Repair*, *Equipment Tracking and Allocation*, and *Preventive Maintenance* procedures.
- **Labor:** Monitor labor productivity and address any issues related to workforce performance or availability.

4.8. Progress Monitoring and Reporting:

- **Tracking:** The Site Engineer tracks daily progress against the project schedule.

- **Reporting:** Prepare and submit daily and weekly reports as per the *Daily/Weekly Site Reporting Procedure*.

4.9. Managing Changes:

- **Variations:** Identify, document, evaluate, approve, and implement any changes to the project scope, design, or schedule according to the *Variation Order Procedure*.

4.10. Subcontractor Management:

- **Oversight:** Oversee and manage subcontractor performance according to the *Subcontractor Management Procedure*.

4.11. Addressing Issues:

- **Problem Solving:** Identify and address site issues, technical queries, or discrepancies promptly.
- **RFIs:** Utilize the Request for Information (RFI) process (refer to *RFI Management Procedure* - if created) to seek clarifications from the Principal Designer or other relevant parties.

4.12. Approaching Completion:

- **Pre-Completion Inspections:** As work nears completion, the Project Engineer and Site Engineer conduct pre-completion inspections to identify items requiring rectification before the final inspection.
- **Punch Listing:** Initiate the punch listing process (Refer to *Demobilization and Post-Project Activities Procedure*).
- **Coordination for Handover:** Begin coordinating activities required for substantial completion and project handover.

7. Records Generated (Deliverables)

(Note: Most specific deliverables are generated by the referenced procedures. This procedure primarily ensures these are followed.)

- Records related to Site Setup Verification
- Records related to Resource Coordination
- Records related to Supervision and Coordination (e.g., Construction Logbook)
- Records generated by referenced Safety, QA/QC, Material Management, Equipment Management, Reporting, Variation Order, and Subcontractor Management procedures

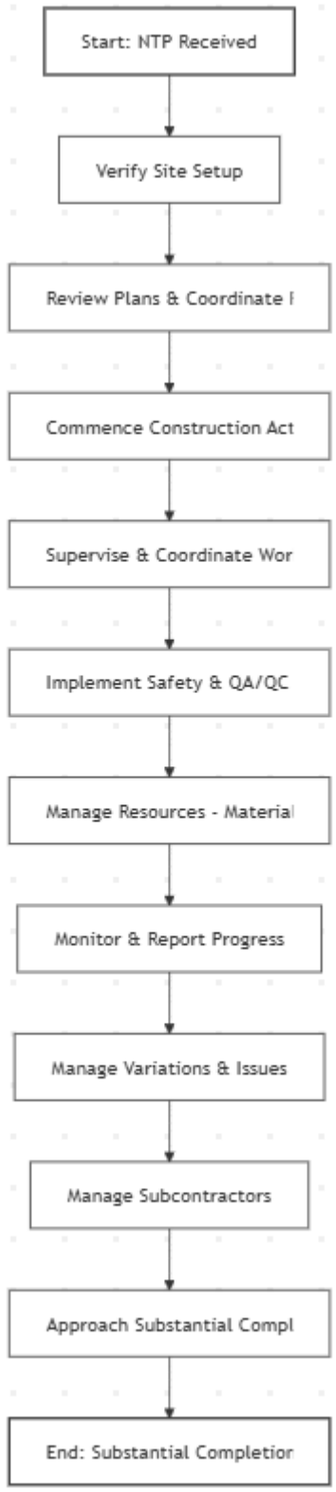

Prepared by:	Reviewed by:	Approved by:	Noted by:
Marcone John Perea *Office Engineer*	**Mark Anthony Pajes** *Project Engineer*	**Nemesia P. Baylon** *Development Director*	**Adrian Carlo Escay** *President & CEO*