	Document No.	Section No.
	Effective Date:	Revision No.
	PROCEDURAL MANUAL	
	MOBILIZATION AND PRE-PROJECT ACTIVITIES	

OBJECTIVE	This procedure outlines the steps and responsibilities for effectively mobilizing resources and executing pre-project activities after a project is awarded and before on-site construction begins. The aim is to ensure a smooth transition into the construction phase, minimizing delays and maximizing efficiency during project startup.
SCOPE	This procedure applies to all construction projects undertaken by BHBI. It covers the period between project award/contract signing and the official start of on-site construction activities (Notice to Proceed).

Responsibilities

- **Project Manager:** Overall responsibility for the successful execution of mobilization and pre-project activities. Coordinates all involved parties and ensures timely completion of tasks.
- **Project Engineer:** Responsible for assisting the Project Manager in planning and coordinating pre-project activities, including design finalization, permitting, procurement, and site setup.
- **Site Engineer:** Responsible for on-site preparations, including site investigation, logistics planning, and overseeing site mobilization activities.
- **Principal Designer:** Responsible for finalizing design documents, coordinating with consultants, and addressing any design-related issues during the pre-construction phase.
- **Procurement:** Responsible for procuring materials, equipment, and subcontracts in a timely manner, as per the *Procurement Procedure*.
- **Quantity Surveyor:** Responsible for finalizing cost estimates, preparing the project budget, and managing any cost-related pre-project activities.
- **Safety Officer:** Responsible for developing and implementing project-specific health, safety, and environmental plans, and conducting initial site safety assessments.
- **Office Engineer:** Responsible for managing project documentation and providing administrative support during the mobilization phase.

Flow Chart

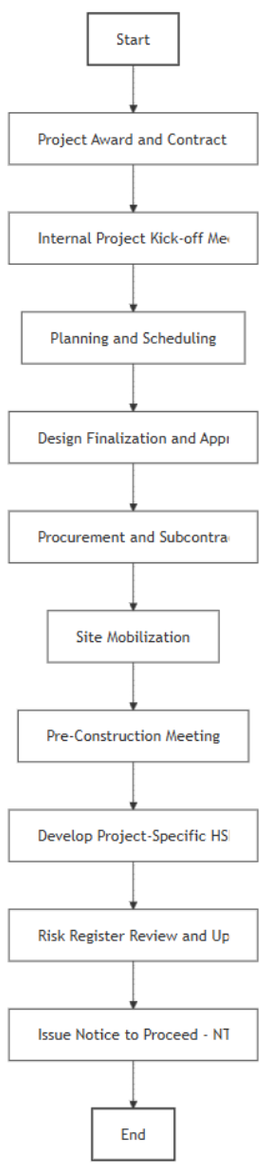

Procedure

4.1. Project Award and Contract Review:

- **Receive and Review Contract Documents:** Upon project award, the Project Manager and Quantity Surveyor thoroughly review all contract documents, including the agreement, general conditions, special conditions, drawings, specifications, and any addenda.
- **Contract Execution:** Ensure the contract is properly executed by all parties.
- **Contract Summary:** The Project Manager prepares a contract summary highlighting key dates, milestones, payment terms, insurance requirements, bonding requirements, and other critical contractual obligations.
  - **Deliverables:** Contract Summary
- **Project Kick-off Meeting (Internal):** The Project Manager conducts an internal kick-off meeting with the project team (Project Engineer, Site Engineer, Principal Designer, Quantity Surveyor, Safety Officer, Procurement, Office Engineer) to review the contract, discuss project objectives, assign responsibilities, and establish communication protocols.
  - **Deliverables:** Project Kick-off Meeting Minutes

4.2. Planning and Scheduling:

- **Develop Project Baseline Schedule:** The Project Manager, in collaboration with the Project Engineer and other key stakeholders, develops a detailed project baseline schedule using appropriate scheduling software (e.g., Primavera P6, Microsoft Project). The schedule should include all major activities, milestones, and dependencies, including pre-project activities. (Refer to the *Project Scheduling Procedure*).
  - **Deliverables:** Project Baseline Schedule
- **Resource Allocation:** Allocate resources (labor, equipment, materials) to the project schedule, in coordination with Procurement.
- **Cash Flow Projections:** The Quantity Surveyor develops cash flow projections based on the project schedule and payment terms.
  - **Deliverables:** Cash Flow Projections

4.3. Design Finalization and Approvals:

- **Review and Finalize Design Documents:** The Principal Designer ensures that all design documents are complete, coordinated, and in compliance with the contract requirements. (Refer to the *Design and Planning Procedure*).
- **Obtain Necessary Permits and Approvals:** The Project Engineer identifies and obtains all necessary permits and approvals from relevant authorities (e.g., building permits, environmental permits). (Refer to the *Permit and Regulatory Compliance Procedure*).
  - **Deliverables:** Approved Building Permits, Other Required Permits

4.4. Procurement and Subcontracting:

- **Procurement Schedule:** Procurement develops a procurement schedule aligned with the project baseline schedule, identifying lead times for materials and equipment.
  - **Deliverables:** Procurement Schedule
- **Material Procurement:** Procurement initiates the procurement of long-lead items and essential materials according to the procurement schedule. (Refer to the *Procurement Procedure*).
- **Subcontractor Selection and Contracting:** Procurement manages the subcontractor selection and contracting process, following BHBI's *Accreditation of Contractor*, *Bidding of Contractor*, and *Subcontractor Management* procedures.

4.5. Site Mobilization:

- **Site Investigation:** The Site Engineer conducts a thorough site investigation to assess existing conditions, identify potential hazards, and plan site access and logistics. (Refer to the *Site Logistics and Planning Procedure*)
  - **Deliverables:** Site Investigation Report
- **Site Setup Plan:** The Project Engineer and Site Engineer develop a detailed site setup plan, including temporary facilities, site security, utilities, material laydown areas, equipment staging areas, and a traffic management plan. (Refer to the *Site Logistics and Planning Procedure*).
  - **Deliverables:** Site Setup Plan
- **Site Mobilization:** The Site Engineer oversees the implementation of the site setup plan, coordinating with subcontractors and suppliers as needed. This includes:
  - Erecting temporary facilities (offices, storage, toilets, etc.).
  - Installing site security measures (fencing, access control).
  - Connecting temporary utilities (power, water, internet).
  - Establishing communication systems.

4.6. Pre-Construction Meetings:

- **Pre-Construction Meeting (External):** The Project Manager conducts a pre-construction meeting with the client, architect, consultants, and key subcontractors to:
  - Introduce the project team.
  - Review the project schedule and milestones.
  - Discuss communication protocols.
  - Address any outstanding issues or questions.
  - **Deliverables:** Pre-Construction Meeting Minutes

4.7. Health, Safety, and Environment (HSE):

- **Project-Specific HSE Plan:** The Safety Officer develops a project-specific HSE plan that addresses site-specific hazards, safety procedures, and emergency response protocols. (Refer to the *Site Safety Procedure* and *EHS Procedure*)
  - **Deliverables:** Project-Specific HSE Plan
- **Safety Training and Inductions:** The Safety Officer conducts initial safety training and inductions for all project personnel, including subcontractors.

4.8. Quality Assurance and Quality Control (QA/QC):

- **Project-Specific QA/QC Plan:** QA/QC Personnel develop a project-specific QA/QC plan that outlines inspection procedures, testing requirements, and documentation protocols. (Refer to the *Quality Assurance and Control Procedure*).
  - **Deliverables:** Project-Specific QA/QC Plan

4.9. Risk Management:

- **Risk Register Review:** The Project Manager, in collaboration with the project team, reviews and updates the project risk register, identifying any new risks associated with the mobilization and pre-construction phase. (Refer to the *Risk Management Procedure*).
    - **Deliverables:** Updated Risk Register
- **Mitigation Measures:** Implement appropriate mitigation measures to address identified risks.

4.10. Notice to Proceed (NTP):

- **Issue NTP:** Once all pre-project activities are satisfactorily completed and all preconditions are met, the client issues the official Notice to Proceed, authorizing the start of on-site construction activities.
    - **Deliverables:** Signed Notice to Proceed (NTP)

5. Documentation:

- Maintain comprehensive records of all mobilization and pre-project activities, including:
    - Contract documents and summaries
    - Project schedules and updates
    - Meeting minutes
    - Permits and approvals
    - Procurement records
    - Subcontract agreements
    - HSE plans and training records
    - QA/QC plans and inspection reports
    - Risk register and mitigation plans
    - Site investigation reports
    - Site setup plan

Records Generated (Deliverables)

- Contract Summary
- Project Kick-off Meeting Minutes
- Project Baseline Schedule
- Cash Flow Projections
- Approved Building Permits
- Other Required Permits
- Procurement Schedule
- Site Investigation Report
- Site Setup Plan
- Pre-Construction Meeting Minutes
- Project-Specific HSE Plan
- Project-Specific QA/QC Plan
- Updated Risk Register
- Signed Notice to Proceed (NTP)

Item	Status (Complete/Incomplete/NA)	Notes
Contract fully executed		
Project team mobilized		
Baseline schedule finalized		
Permits and approvals obtained		
Site investigation completed		
Site setup plan finalized		
Temporary facilities installed		
Site security in place		
Utilities connected		
Procurement schedule developed		
Key materials ordered		
Subcontractors selected and agreements executed		
Pre-construction meeting held		
Project-specific HSE plan developed		
HSE training conducted		
Project-specific QA/QC plan developed		
Risk register reviewed and updated		
Notice to Proceed received		